

STEALTH 8000™

CLEAR FRAME - CLEAR HC LENS (K)

PRODUCT CODE: ASA790-161-300

LOW PROFILE TENSION CONTROL TEMPLES PROVIDE EXTRA GRIP & ARE SUITABLE FOR USE WITH HEARING PROTECTION

TECHNICAL SPECIFICATION

EYE & FACE PROTECTION

DIMENSIONS OF INNER PACKAGING

Quantity: 10

Weight: 265g (Approx.)



HEIGHT:
85mm


WIDTH:
172mm

LENGTH:
290mm

DIMENSIONS OF OUTER PACKAGING

Quantity: 120

Weight: 3.8kg (Approx.)

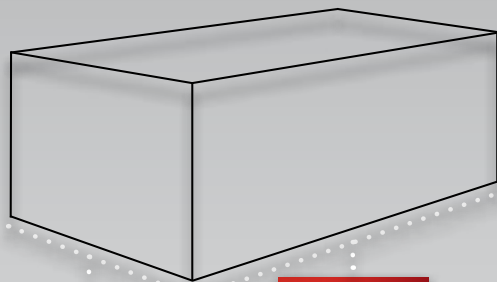

HEIGHT:
377mm


WIDTH:
315mm

LENGTH:
545mm

MARKINGS

Frame: EN166 1.FT

Amber/Clear Lens: 2-1.2  1.F.T.K

Indoor/Outdoor Lens: 5-1.7  1.F.T

Smoke Lens: 5-2.5  1.F.T.K

DIMENSIONS OF SPECTACLE

Lens Thickness: 2.2mm

Lens Base: 9mm curve

Lens Size (Vertical): 43mm

Lens Size (Diagonal): 85mm

Bridge: 15mm

Temple Length (Lens to tip): 152mm

Overall Width: 145mm

Closest point between temple tips: 95mm

Weight: 26g (Approx.)



HARDIA+™ LENS COATING

A permanent coating that was developed to offer extreme scratch resistance protection. The coating exceeds the requirements of EN166 testing for K (Scratch-Resistance)

LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Stealth 8000™ is not suitable for protection against dusts, liquids or molten metals